



Salvo SGL

The Salvo Glad Hand Lock (SGL) is a key operated mechanical locking device designed to fit on to all European and US trailer, emergency brake line connectors. Its purpose is to prevent re-connection of the air brake hose, thereby immobilising the trailer. When fitted, the SGL can only be removed with the permit key.


Operation

①




Disconnect the airline from the trailer connector, then engage the centre peg of the SGL on to the air line connector on the trailer.

②



Rotate SGL downwards.

③



Slide the SGL lock portion towards the air line connector.

④



Only when the Salvo SGL is on the connector can the key be rotated anti-clockwise and removed.

Removal of the SGL lock is the reverse of the above procedure.
When operation is complete, please return to its normal storage location or issuer.

Precautions



Salvo SGL is heavy. During the course of normal use, it may become dirty, greasy and slippery. If you drop it on your foot, you may sustain serious injury. Handle with care. Wear appropriate personal protective clothing.

Maintenance

A lubrication point is provided adjacent to the key entry aperture and trigger mechanism. The recommended lubricant is Armna G4789 or equivalent. The recommended lubrication interval is 6-12 months as required. Keeping the Salvo SGL clean will ensure long and reliable service.


Technical Data

Working Temperature	Min -25°C (ice free) Max. +55 °C
Weight	2,0 kg
Housing Material	Light alloy / Stainless steel
Lock Material	Stainless Steel
Standards	Conforms with; (EU) ISO 1728-1980 Palm Type Coupling (USA) SAE J318 Glad Hand Connector

Drawing

Dimensions:
in mm

SALVO SGL

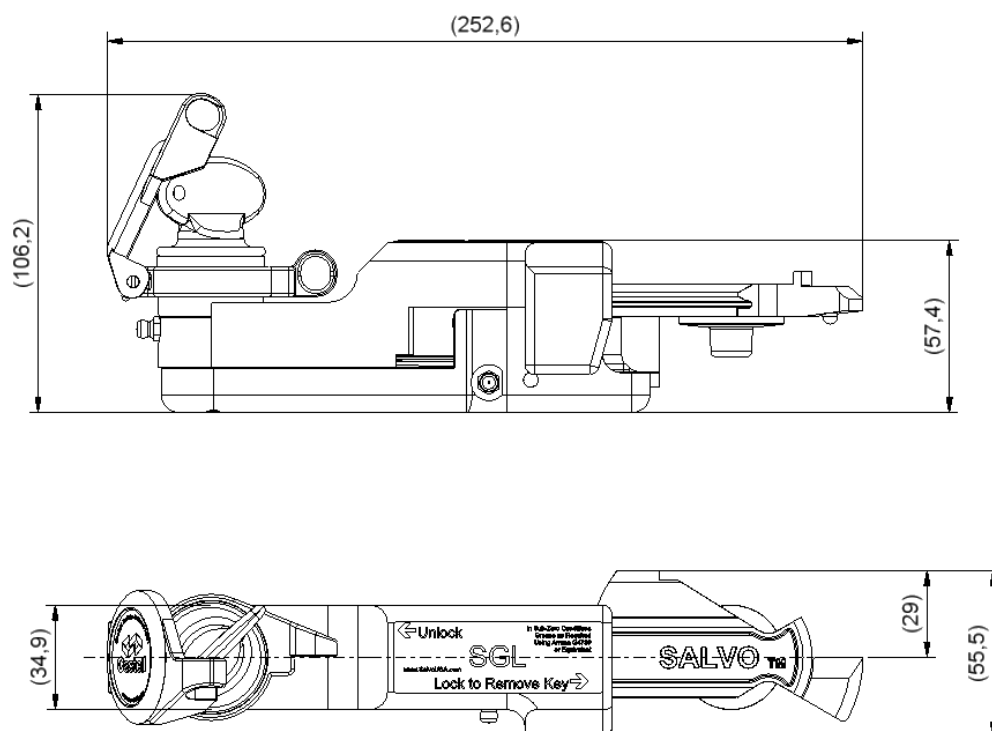

Order Information

Please advise part number, symbol and dog tag when ordering.

(** mandatory information)

Part Number**

006504

Symbol**

please advise

Dog Tag**

please advise